

# THE ABOVE GROUND FILTER

# AGF



**NO GRATE LIFTING NEEDED!**

**40" x 27"**  
*custom sizes available*



[SALES@PSIENVIRO.COM](mailto:SALES@PSIENVIRO.COM) | (800) 808-1774 | [WWW.PSIENVIRO.COM](http://WWW.PSIENVIRO.COM)

## ABOVE GROUND FILTER (AGF) INSTALLATION INSTRUCTIONS




**1.** Remove packaging with the instructions and baling wire from the AGF. Place the AGF over the grate of the storm drain you wish to protect.



**2.** Each long side (front and back) of the AGF has a rigid slat that can be lifted vertically and pressed against the curb to provide protection to a curb inlet. If there is not a curb inlet, simply leave the AGF flat over the entire grate.




**3.** Starting with one corner, lift the filter to expose the grate and loop the baling wire down and around one of the grate pieces.

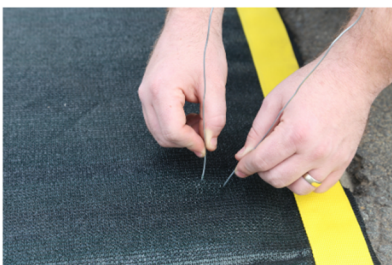

**4.** Pierce the AGF with both ends of the baling wire through the bottom of the filter and feed upward through the unit so the baling wire is exposed at the top.



[sales@psienviro.com](mailto:sales@psienviro.com) | (800) 808-1774  
[www.psienviro.com](http://www.psienviro.com)

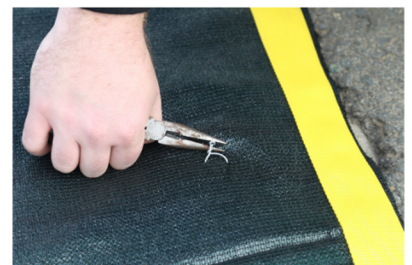

**5.** Secure the filter to the grate by twisting the baling wire. Once twisted, trim the excess wire and flatten it to hide sharp edges. Repeat steps 3-5 for the remaining corners.